

# Technical data sheet

External corner hood, for Rapid 80 device installation trunking, type 70110

Item number: 6274212



External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.



Polycarbonate/Acrylnitrile-butadiene-styrene

## Master data

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| Item number                        | 6274212                                      |
| Type                               | GK-AH70110LGR                                |
| Description 1                      | External corner                              |
| Description 2                      | variable                                     |
| Manufacturer                       | OBO                                          |
| Dimension                          | 70x110mm                                     |
| Colour                             | Light grey; RAL 7035                         |
| Material                           | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit                | 1                                            |
| Unit of quantity                   | Piece                                        |
| Weight                             | 15 kg                                        |
| Weight unit                        | kg/100 pc.                                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,0808 kg CO2e / 1 Piece                     |


# Technical data sheet

External corner hood, for Rapid 80 device installation trunking, type 70110

Item number: 6274212



## Dimensions

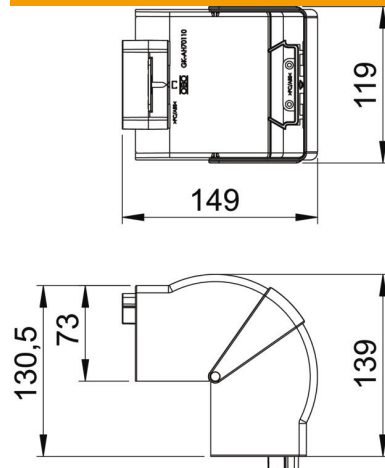

|        |          |
|--------|----------|
| Length | 130.5 mm |
| Width  | 119 mm   |
| Height | 73 mm    |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Number of covers                  | 1            |
| Version for                       | Hood fitting |
| for duct width                    | 110 mm       |
| for trunking height               | 70 mm        |
| Halogen-free                      | yes          |
| Cable retaining clip              | no           |
| Duct connector                    | no           |
| Cover mounting type               | Cross-over   |
| Mounting perforation in base      | no           |
| Cover width                       | 0 mm         |
| Cover width 2                     | 0 mm         |
| Cover width 3                     | 0 mm         |
| Protection rating                 | IP30         |
| Protective film                   | no           |
| Protection rating IK code         | IK08         |
| Symmetrical                       | yes          |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -15 °C       |
| Angle range, max.                 | 100 mm       |
| Angle range, min.                 | 80 mm        |