

# Technical data sheet

## Cover, cross-over 600 A2

Item number: 7027870



Cover for cross-over fitting for lockable and screw-on cable trays in indoor and outdoor areas, to protect cables against damage and soiling. Fastening through attachment of the section cover. Suitable for all side heights. The cover can be used with fittings of all side heights.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7027870                   |
| Type                               | RKD 600 A2                |
| Description 1                      | Cover                     |
| Description 2                      | for cross-over            |
| Manufacturer                       | OBO                       |
| Dimension                          | B600mm                    |
| Colour                             | stainless steel           |
| Material                           | Stainless steel           |
| Surface                            | Bright, treated           |
| Surface standard                   |                           |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 400 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 37,3303 kg CO2e / 1 Piece |


# Technical data sheet

Cover, cross-over 600 A2

Item number: 7027870



## Dimensions

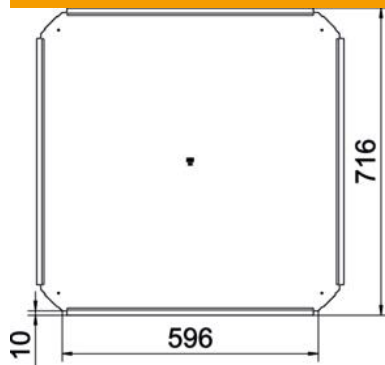

|                 |        |
|-----------------|--------|
| Width           | 600 mm |
| Plate thickness | 1 mm   |
| Dimension B     | 600 mm |

## Technical data

|                                   |        |
|-----------------------------------|--------|
| Number of turn buckles            | 0 St.  |
| Fastening type                    | On top |
| Suitable for cable ladder         | no     |
| Suitable for cable tray           | yes    |
| Rustproof steel, pickled          | no     |
| Permitted temperature range, max. | 120 °C |
| Permitted temperature range, min. | -20 °C |