

Technical data sheet

UVS energy distributor with fixed connection, normal circuit

Item number: 6108013



Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: one single-phase circuit using a self-locking connector, 3-pin, Type GST18i (connector part).

Output: Six self-locking connectors, 3-pin, in black, 16 A, Type GST18i

Internal wiring: PVC non-sheathed cable H07V-U2.5.



St

Steel

FS

Strip galvanized

Master data

Item number	6108013
Type	UVS-6S2SA1P
Description 1	Underfloor distributor
Description 2	with plug connection
Manufacturer	OBO
Dimension	160x150x48
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	79 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	2,0589 kg CO2e / 1 Piece


Technical data sheet

UVS energy distributor with fixed connection, normal circuit

Item number: 6108013



Dimensions

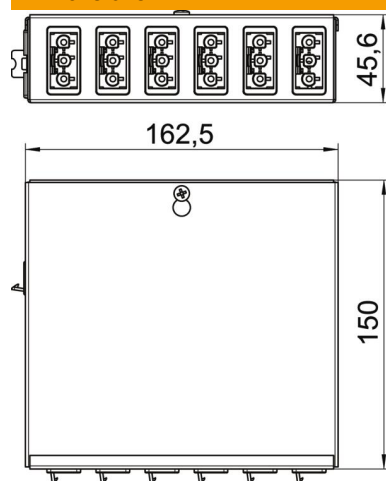

Technical data

Connection type	Plug-in system
Input	3-pin
Colour of the plug connector system	Black