


# Technical data sheet

## Series terminals 10 mm<sup>2</sup>, polypropylene

Item number: 2056716



Tested according to EN 60998. Steel terminals, steel screws, electrogalvanised, 12-pin, individual terminals detachable from strips using "twist'n'pull". Captive upwards screw. Max. approved ambient temperature to EN 60998: -5 to +80 °C. Nominal cross-section 10 ± mm<sup>2</sup> Nominal voltage 450 V Nominal current 57 A Max. connections per side: 10 mm<sup>2</sup> rigid or 6 mm<sup>2</sup> flexible.

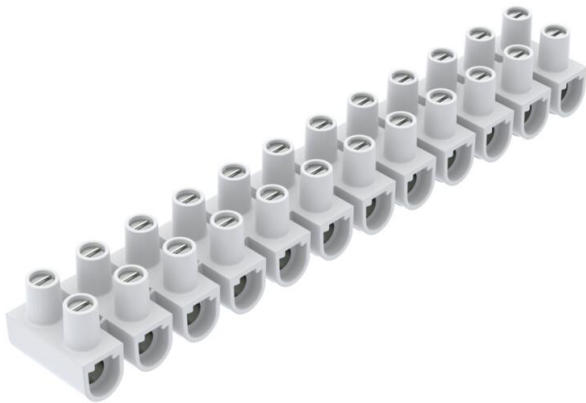

**PP** Polypropylene

### Master data

Item number	2056716
Type	76 CE WS/ORLK 10
Description 1	Terminal strip
Available from	01.12.2025
Manufacturer	OBO
Dimension	10mm <sup>2</sup>
Colour	White
Material	Polypropylene
Smallest sales unit	500
Unit of quantity	Piece
Weight	4.13 kg
Weight unit	kg/100 pc.

# Technical data sheet

Series terminals 10 mm<sup>2</sup>, polypropylene

Item number: 2056716



## Dimensions



Length	134 mm
Width	23 mm
Height	17 mm

## Technical data

Closing plate required	no
Connectable conductor cross-section, single-wire, max.	10 mm <sup>2</sup>
Connectable conductor cross-section, single-wire, min.	2.5 mm <sup>2</sup>
Connectable conductor cross-section, fine-wire without wire-end ferrule, max.	6 mm <sup>2</sup>
Connectable conductor cross-section, fine-wire without wire-end ferrule, min.	2.5 mm <sup>2</sup>
Connectable conductor cross-section, multi-wire, max.	6 mm <sup>2</sup>
Connectable conductor cross-section, multi-wire, min.	2.5 mm <sup>2</sup>
Connection position	Side
No. of terminals	12
Number of screwless terminals per pole	2
Version of electrical connection 1	Screw connection
Version of electrical connection 2	Screw connection
Drill hole spacing, centre	11.5 mm
Explosion-tested version	no
Suitable for flexible conductors	yes
Suitable for solid conductors	yes
Suitable for multi-wire conductors	yes
Mounting type	Direct mounting
Nominal cross-section, min.	10 mm <sup>2</sup>
Nominal voltage	450 V
Nominal current	57 A
Pole number	12
Cross-section	Max. connections per side: 10 mm <sup>2</sup> rigid or 6 mm <sup>2</sup> flexible mm <sup>2</sup>
Screw tightening torque	0.8 Nm
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-5 °C

# Technical data sheet

Series terminals 10 mm<sup>2</sup>, polypropylene

Item number: 2056716



## Technical data

Transparent	no
Ambient temperature	80 °C